


# “Defender” Basketball Court Package by FLEX COURT™

The concrete pad size needs to be 24'1" x 24'1" x 4" Thick

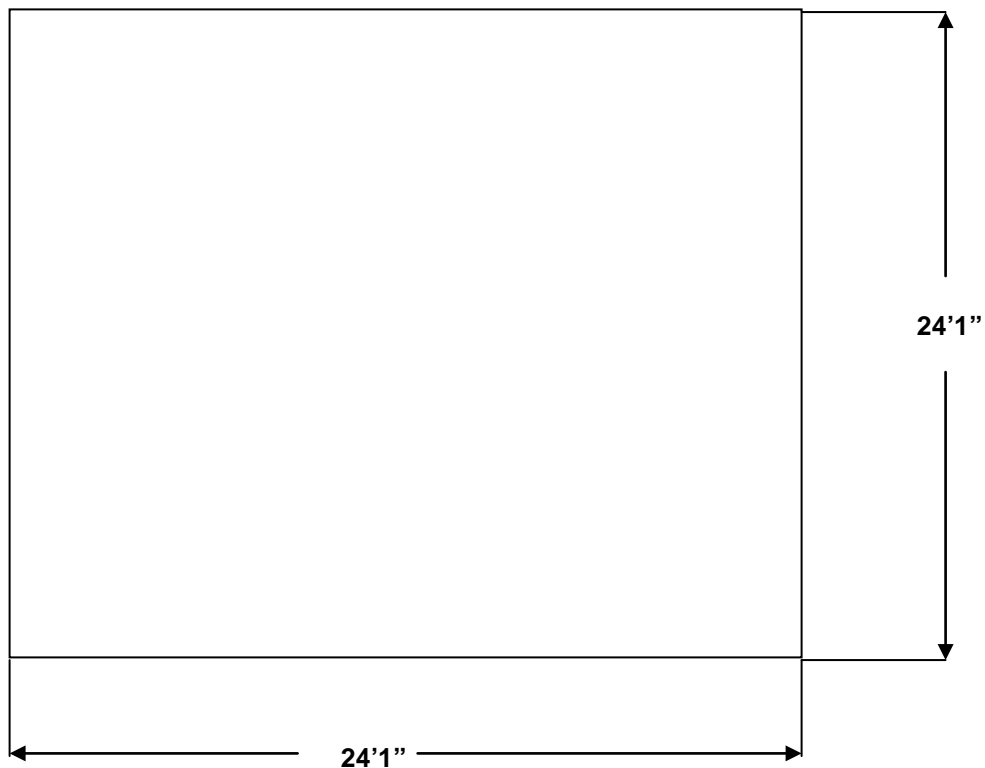

## The Placement of the Hoops are Shown below for the

The FleXtreme 448 – The front of the Pier Kit Plate needs to be centered 8" from the edge of the concrete pad.

- With Ramps the front of the pier kit plate needs to be centered 6" from the edge of the concrete pad

The FleXtreme 560– The placement needs to be centered 20.5" from the front of the pier Kit plate to the edge of the concrete pad

- With Ramps the front of the pier kit plate needs to be centered 18.5" from the edge of the concrete

The FleXtreme 672 – The placement needs to be centered 20" from the front of the pier Kit plate to the edge of the concrete pad

- With Ramps the front of the pier kit plate needs to be Centered 18" from the edge of the concrete